

DEPARTMENT OF HOMELAND SECURITY

Federal Emergency Management Agency ELEVATION CERTIFICATE

IMPORTANT: FOLLOW THE INSTRUCTIONS ON PAGES 9-16

OMB Control Number: 1660-0008 Expiration: 11/30/2018

Copy all pages of this Elevation Certificate and all attachments for (1) community	y official, (2) insurar]			
SECTION A - PROPERTY INFORMATION		FORM INSURA	NCE COMP	ANY USE]			
A1. Building Owner's Name The Scaricamazza's			Policy Number:					
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or Box No.	Company NAIC Number:							
32 N. 29th Ave.		ittamber.						
City BOROUGH OF LONGPORT	State NJ		Zip Code	08403				
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Lega Block 37 lot 10	al Description, etc.)							
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, et	tc.) RESIDENTIAL			MUI,	2 3 2016			
Ao. Landae/Longitude. Lat. 14 55.5155 Long. VV 074,3255		NAD 1927	● NAD 198					
A6. Attach at least 2 photographs of the building if the Certificate is being us	ed to obtain flood i	nsurance.		FCROUGH	OF LONGPORT			
A7. Building Diagram Number 7				CONSTR	UCTION OFFICE			
A8. For a building with a crawlspace or enclosure(s):	A9. For a buildin	g with an attach	ed garage:					
a) Square footage of crawlspace or enclosure(s) 1172 sq. ft. sq ft	a) Square footag	·		sq ft				
b) Number of permanent flood openings in the 7* crawlspace or enclosure(s) within 1.0 foot above adjacent grade	 b) Number of period in the attached above adjacer 	d garage within						
c) Total net area of flood openings in A8.b 1400* sq in	c) Total net area	of flood opening	gs in A9.b N//	A sqir	i			
d) Engineered flood openings?	d) Engineered flo	ood openings?	(Yes	€ No				
SECTION B - FLOOD INSURANCE RAT	E MAP (FIRM) INF	ORMATION						
B1. NFIP Community Name & Community Number B2. Cour BOROUGH OF LONGPORT & 345302 B2. Cour	nty Name C COUNTY			B3. State NJ	~			
B4. Map/Panel Number 345302 / 0001 B5. Suffix B6. FIRM Index Date Revised D No Index Printed B7. FIRM Pan Revised D 08/15/1983		Flood Zone(s)		ood Elevation(s) O, use base flood				
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood FIS Profile FIRM Community Determined Other/Source: B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929					22			
B12. Is the building located in a Coastal Barrier Resources System (CBRS) a	rea or Otherwise P	rotected Area (C	DPA)? CY	es 🖲 No				
Designation Date: CBRS OPA								
SECTION C - BUILDING ELEVATION INFO	RMATION (SURVE Iding Under Constr		Finished Cor	otruction	1			
C2. Elevations - Zones A1 - A30, AE, AH, A (with BFE), VE, V1 - V30, V (with Complete Items C2.a -h below according to the building diagram specified in A new Elevation Certificate will be required when construction of the building	h BFE), AR, AR/A, Item A7. In Puerto	AR/AE, AR/A1 -	A30, AR/AH					
Benchmark Utilized: private Ver	rtical Datum: NGVI	029						
Indicate elevation datum used for the elevations in items a) through h) below. Other/Source:	● NGVD 1929	○ NAVD 1988						
Datum used for building elevations must be the same as that used for the BFI	E.		Check the m	easurement used.	12			
Top of bottom floor (including basement, crawlspace, or enclosure floor)	6.4 -		(e) feet	1828				
c) Top of the next higher floor	14.2 -		(e feet	350				
c) Bottom of the lowest horizontal structural member (V Zones only)	N/A -		(feet	C meters				
d) Attached garage (top of slab)	<u>N/A</u> -		(e) feet	C meters				
 Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments) 	12.3**** -	***************************************	• feet	meters				
) Lowest adjacent (finished) grade next to building (LAG)	5.6		(e) feet	meters				
g) Highest adjacent (finished) grade next to building (HAG)	6.8 -		(e feet	Cmeters				
 Lowest adjacent grade at lowest elevation of deck or stairs, including structural support 	5.5 -	(**************************************	(feet	C meters				

ELEVATION CERTIFICATE

32 N. 29th Ave.

BOROUGH OF LONGPORT

NJ

OMB Control Number: 1660-0008 Expiration: 11/30/2018


08403

SECTION D -	SURVEYOR, ENGINEE	R, OR A	RCHITECT CER	RTIFICATION					
This certification is to be signed and sealed by a that the information on this Certificate represent	a land surveyor, enginee s my best efforts to inter	r, or arc	nitect authorized	by law to certify elevation information. I certify					
Check here if attachments.	AT THE PARTY OF TH								
Certifier's Name Paul M. Koelling, PLS, CFM	Lice	nse Nun 4GS 043							
Title	Company Name			PLACE SEAL					
Licensed Land Surveyor Address	Paul Koelling&AssocLl City	State	Zip Code	HERE					
2161 Shore Road Signature	Linwood	NJ	08221						
Jal-Hoell	Date 6/14/2016	Teleph +1 (6	09) 927-0279						
Copy both sides of this Elevation Certificate for (nce agent/compa	ny, and (3) building owner.					
Comments (including type of equipment and loci *A8b.) Smart Vents Model #1540-520 engineers (enclosure 1147 sf elevator 25 sf Total 1 **B8 & B9.) FEMA Pre-FIRM Zone "AE"Bas ***C2a.) enclosure ****C2a.) ductwork elev. 12.7, furnace elev. 14.	ed for 200 square inche 172 sf) e Flood Elevation 9 ft. (f	s of net a) converted = 10	56 NO. 146 Process (1880 NO. 1885 NO.					
Signature Signature				D-1-0/4/0040					
1/				Date 6/14/2016					
SECTION E - BUILDING ELEVATION INFO	DRMATION (SURVEY N	OT RE	QUIRED) FOR Z	ONE AO AND ZONE A (WITHOUT BFE)					
For Zones AO and A (without BFE), complete Ite Sections A, B,and C. For Items E1 -E4, use natu	ms E1 -E5. If the Certific ral grade, if available. C	cate is in heck the	tended to suppor measurement us	rt a LOMA or LOMR-F request, complete sed. In Puerto Rico only, enter meters.					
E1. Provide elevation information for the following highest adjacent grade (HAG) and the lowest	g and check the appropriated adjacent grade (LAG).	riate box	es to show wheth	ner the elevation is above or below the					
 a) Top of bottom floor (including basement, coor enclosure) is 	rawlspace,		C feet C m	eters above or below the HAG.					
 b) Top of bottom floor (including basement, c or enclosure) is 	rawlspace,		C feet C me	eters above or below the LAG.					
E2. For Building Diagrams 6 -9 with permanent fl nigher floor (elevation C2.b in the diagrams) of th	ood openings provided i e building is	n Sectio	n A Items 8 and/o	or 9 (see pages 8 -9 of Instructions), the next meters above or below the HAG.					
E3. Attached garage (top of slab) is			€ feet € me	eters above or below the HAG.					
E4. Top of platform of machinery and /or equipme servicing the building is	ent 		C feet C me	eters above or below the HAG.					
E5. Zone AO only: If no flood depth number is available. The second of	ailable, is the top of the Unknown. The local offi								
SECTION F - PROPER									
The property owner or owner's authorized represe	entative who completes	Sections	A, B, and E for	Zone A (without a FEMA-issued or					
community-issued BFE) or Zone AO must sign he Property Owner or Owner's Authorized Represen		ections	A, B, and E are c	orrect to the best of my knowledge.					
Address	City		State	ZIP Code					
Signature	Date		Telephone						
Comments									
				Check here if attachments.					

Building Photographs

Policy Number	
Company NAIC Number	
9	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least two building photographs below according to the instructions for Item A6. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." If submitting more photographs than will fit on this page, use the Continuation Page on the reverse.

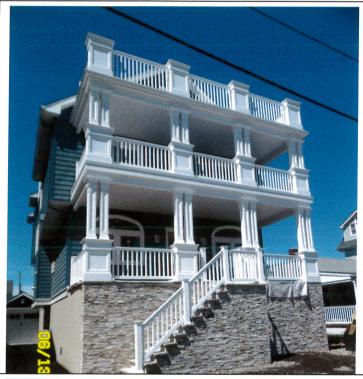









ICC-ES Evaluation Report

ESR-2074

Reissued February 1, 2009

This report is subject to re-examination in two years.

www.icc-eg.org | (800) 423-6567 | (562) 699-0543

A Subsidiery of the International Code Council®

DIVISION: 10-SPECIALTIES Section: 10230-Vents

REPORT HOLDER:

SMART VENTS, INC. 460 ANDBRO DRIVE, SUITE 28 PITMAN, NEW JERSEY 08071 (856) 307-1468 www.smartvent.com eval@amartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: FLOODVENT" MODEL #1640-620; FLOODVENT" STACKING MODEL #1640-521; SMARTVENT" MODEL #1640-810; SMARTVENT" STACKING MODEL \$1640-811; WOOD WALL FLOOD MODEL \$1640-670; WOOD WALL #1540-574: FLOOD OVERHEAD DOOR MODEL FLOODVENT OVERHEAD DOOR MODEL #1640-624; SMARTVENT" OVERHEAD DOOR MODEL #1640-614

1.0 . EVALUATION SCOPE

Compliance with the following codes:

- 2006 International Building Code® (IBC)
- 2006 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent units are automatic foundation flood vents (AFFVs) employed to equalize hydrostatic pressure on nonfire-resistance-rated foundation wells, rolling-type overheed doors and building walls subject to rising or falling flood waters. Certain models also allow natural ventilation in accordance with Section 1203 of the IBC or Saction 408.1 of the IRC.

3.0 DESCRIPTION

3.1 General:

When subjected to pressure from rising water, the Smart Vent AFFVs disengage, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The AFFV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the plate to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel, and each opening provides 76 square inches (49 032 mm²) of net free area for flood mitigation in the open position. The Stacking Model #1540-511 Smart/ENT™ FloodVENT™ Stacking Model #1540-521 units each contain two vertically arranged openings per unit, providing 152 square inches (96 064 mm²) of net free area for flood mitigation in the open position.

3.2 Engineered Opening:

The AFFVs comply with the design principle noted in Section 2.6.2.2 of ASCE/SEI 24 for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent AFFVs must be installed in accordance with Section 4.0.

3.3 Model Stree:

The FloodVENT™ Model #1540-520, SmartVENT™ Model #1540-510, FloodVENT™ Overhead Door Model #1540-524, and SmartVENT™ Overhead Door Model #1540-514 units measure 153/4 inches wide by 73/4 inches high (400 by 196.9 mm). The Wood Wall Flood Model #1540-570 and Wood Wall Flood Overhead Door Model #1540-574 units measure 14 inches wide by 53/4 inches high (355.6 by 222.25 mm). The SmartVENT™ Stacking Model #1540-511 and FloodVENT™ Stacking Model #1540-521 units measure 16 inches wide by 16 inches high (405.4 by 406.4 mm).

3.4 Ventilation:

The SmartVENT Model #1540-510 and SmartVENT Overhead Door Model #1540-514 both have screen covers with 1/e-inch-by-1/e-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT™ Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm2) of net free area to supply natural ventilation. Other AFFVs recognized in this report do not offer natural ventilation.

4.0 INSTALLATION

SmartVENT® and FloodVENT™ are designed to be installed into wells or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. The mounting straps allow mounting in wood, masonry and concrete wells up to 12 inches (305 mm) thick. In order to