## **ELEVATION CERTIFICATE**

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

	SECTION A PRO	OPERTY INFO	ORMATION		FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	Deborah Fi				POLICY NUMBER
STREET ADDRESS (Including A	ot., Unit, Suite and/or 8ldg. N 100 S. 30t		ROUTE AND BOX NUMBER	Ra A	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and		19			
CITY	Block 48			- v.	
GITT	Longport,	N.J.	= 0,	STATE	ZIP CODE
	SECTION B FL	OOD INSUR	ANCE RATE MAP (FIRM)	INFORMATION	
Provide the following from t	he proper FIRM (See	Instructions):	8		P
1. COMMUNITY NUMBER 345302	2 PANEL NUMBER 0001	3. SUFFIX B	4. DATE OF FIRM INDEX 8/15/83	5. FIRM ZONE A-8	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
s. For Zones A or V, where	no BFE is provided or	the FIRM, ar	ase Flood Elevations (BFE and the community has esta FIRM datum-see Section	ablished a BFE for	Other (describe on back) or this building site, indicate
Section 10 at 1	SECTIO	NC BUILDI	NG ELEVATION INFORM	IATION	
(c). FIRM Zone A (without below (check one)  (d). FIRM Zone AO. The fone) the highest grade level) elevated in accordance to the elevation dat under Comments on Pagithe FIRM [see Section Elevation under Comments. Elevation reference marks. The reference level elevation below the elevation reference level elevation.	VE, and V (with BFE). Is at an elevation of BFE). The floor used the highest grade adjusted adjacent to the building redance with the commum system used in de e 2). (NOTE: If the et al., Item 7], then converts on Page 2.)  used appears on FIRITION to build a struction is complete.)	as the referer acent to the beace level from the second to the beace level from the second to the second to the second to the elevation datumnt the elevation datumnt the elevation datumnt the second to the second the sec	of the lowest horizontal strain feet NGVD (or other FIR noe level from the selected uilding.  In the selected diagram is depth number is available ain management ordinance above reference level element of the datum system used in measuring the element of the datum system used in measuring the element of the datum system used in measuring the element of the datum system used in measuring the element of the datum system used in measuring the element of the datum system used in measuring the element of the datum system used in measuring the element of the datum system used in measuring the element of the datum system used in measuring the element of the datum system used in the datum system in the datum system used in the datum system in the datum system in the datum system in the datum s	M datum—see Set didagram is feet at e., is the building e.? Yes vations: X NGV levations is differed on the FIRM a Page 4) awings reference level of A post-construct.	ection 8, Item 7).  lettion 8, Item 7).  lettion 8, Item 7).  lettion 8, Item 7).  lettion 6, Item 7).  lettion 7, Item 7).  lettion 6, Item 7).  lettion 6, Item 7).  lettion 7, Item 7).  lettion 6, Item 7).  lettion 7, Item 7).  lettion 6, Item 7).  lettion 7, Item 7,
		20			2
			MMUNITY INFORMATIO		
. If the community official re is not the "lowest floor" as floor" as defined by the or ?. Date of the start of constr	dinance is:	inity's floodpla	in management ordinanc GVD (or other FIRM datu	e, the elevation of	of the building's "lowest

REPLACES ALL PREYIOUS EDITIONS

FEMA Form 81-31, MAY 93


## SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	Paul H. Koelling, L.S. License #21771
TITLE	Prof. Land Surveyor Paul H. Koelling & Assoc.
ADDRESS	2161 Shore Road CITY Linwood N.J. 08221 ZIF
SIGNATURE	May 13, 1996 PHONE (609) 927-0279
Coples should be n	le of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.
COMMENTS:	
•	
90 O	

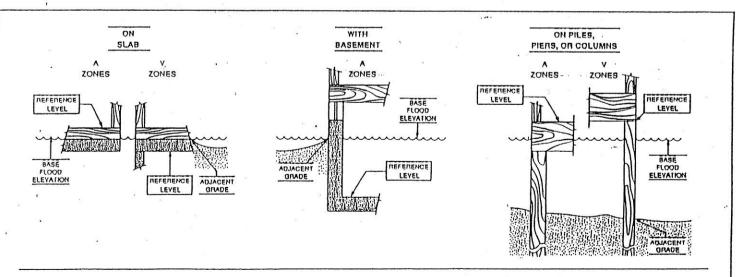

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.