U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008	E In
OMB No. 1660-0008 Expiration Date: November 30	2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

MAY 24 2021

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. FOR INSURANCE COMPANY USE SECTION A - PROPERTY INFORMATION Policy Number: A1. Building Owner's Name Lippman A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Company NAIC Number: Box No. 112 S. 23rd Avenue ZIP Code State City 08403 **New Jersey** Borough of Longport A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.) Lot 15 in Block 18 A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) Residential Horizontal Datum: ☐ NAD 1927 🖂 NAD 1983 Long. -74°31'37.8" A5. Latitude/Longitude: Lat. 39°18'38.4" A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain flood insurance. A7. Building Diagram Number 7 A8. For a building with a crawlspace or enclosure(s): 2300.00 sq ft a) Square footage of crawlspace or enclosure(s) b) Number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade 12 c) Total net area of flood openings in A8.b 2400.00 sq in d) Engineered flood openings? X Yes No A9. For a building with an attached garage: sq ft a) Square footage of attached garage b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade c) Total net area of flood openings in A9.b sq in d) Engineered flood openings? ☐ Yes ☐ No SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION B3. State **B2.** County Name **B1. NFIP Community Name & Community Number New Jersey** Atlantic County Borough of Longport 345302 B9. Base Flood Elevation(s) B7. FIRM Panel B8. Flood B6. FIRM Index B4. Map/Panel B5. Suffix (Zone AO, use Base Flood Depth) Effective/ Zone(s) Date Number Revised Date 9 08-28-2018 AE F 08-28-2018 3401C0442 B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9: ☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source: B11. Indicate elevation datum used for BFE in Item B9:

NGVD 1929

NAVD 1988

Other/Source: B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🗵 No ☐ CBRS ☐ OPA

ELEVATION CERTIFICATE

FEMA Form 086-0-33 (12/19)

OMB No. 1660-0008
Expiration Date: November 30, 202

			⊏xpii	ation Date.	November 30, 2022
IMPORTANT: In these spaces, copy the corre	sponding information fro	m Section A.	FOR	INSURAN	ICE COMPANY USE
Building Street Address (including Apt., Unit, Su 112 S. 23rd Avenue	ite, and/or Bldg. No.) or P.0). Route and Box No.		y Number:	
City	State	ZIP Code	Com	pany NAIC	Number
Borough of Longport	New Jersey	08403		. •	
SECTION C - BUIL	DING ELEVATION INFO	RMATION (SURVEY I	REQUIR	RED)	
*A new Elevation Certificate will be require	d when construction of the				shed Construction
C2. Elevations – Zones A1–A30, AE, AH, A (w Complete Items C2.a–h below according to Benchmark Utilized: NJTCM-Ref 0333	o the building diagram spec	ified in Item A7. In Pue	R/AE, AI rto Rico	R/A1–A30, only, enter	AR/AH, AR/AO. meters.
Indicate elevation datum used for the eleva		atum: <u>N.A.V.D 1988</u>			
□ NGVD 1929 ⊠ NAVD 1988 □		below.			
Datum used for building elevations must be		the RFF			
			Cł	neck the me	easurement used.
 a) Top of bottom floor (including basement 	t, crawlspace, or enclosure	floor)	8.0	× feet	meters
b) Top of the next higher floor			13.1	× feet	meters
c) Bottom of the lowest horizontal structura	al member (V Zones only)		N/A	☐ feet	meters
d) Attached garage (top of slab)	(* _====================================		N/A	☐ feet	meters
e) Lowest elevation of machinery or equipr (Describe type of equipment and location)	ment servicing the building	1	13.1	⊠ feet	☐ meters
f) Lowest adjacent (finished) grade next to	(4) (2) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4		7.4		☐ meters
g) Highest adjacent (finished) grade next to				_	_
	SEC NE SEX	5-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0	7.9	× feet	meters
h) Lowest adjacent grade at lowest elevation structural support	on of deck or stairs, includin	g 	7.6		☐ meters
SECTION D - SUR\	EYOR, ENGINEER, OR	ARCHITECT CERTIF	ICATIO	N	
This certification is to be signed and sealed by a I certify that the information on this Certificate rep statement may be punishable by fine or imprison	THESELLS LLIV DEST ELLOUS TO	ntarnrat tha data availe	law to	certify elev	ation information. hat any false
Were latitude and longitude in Section A provided				Check here	e if attachments.
Certifier's Name	License Number				
George Swensen	GS43415				
Title			7		
Professional Land Surveyor	5			PI	ace.
Company Name The Martinelli Group LLC					
				3	eal
Address 1217 S.Shore Road Suite 106				H	ere
City Ocean View	State New Jersey	ZIP Code 08230			
Signature Darry Lovenson	Date 05-06-2021	Telephone (609) 390-9618	Ext.		
Copy all pages of this Elevation Certificate and all at			gent/con	nnany and	(3) building owner
Comments (including type of equipment and locating there are (12) Smart Vents Model #1540-510 and There are (5) Smart Vents Model #1540-510 in 100 There is Non-Vents 30sq foot Elevator located between the betwe	on, per C2(e), if applicable) located in the foundation on 00sq foot of Garage/Storagween the Garage/Storage	f the building.(See Atta e Area included in sect trea and crawl space r	ched).	with an el	evation of 8.0

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the correspo	nding information f	rom Section A.	FOR INSURA	NCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, 112 S. 23rd Avenue	and/or Bldg. No.) or F	P.O. Route and Box No.	Policy Numbe	r:
City Borough of Longport	State New Jersey	ZIP Code 08403	Company NAI	C Number
SECTION E – BUILDING FOR ZO		RMATION (SURVEY NO A (WITHOUT BFE)	OT REQUIRED)	
For Zones AO and A (without BFE), complete Items complete Sections A, B,and C. For Items E1–E4, us enter meters. E1. Provide elevation information for the following a	e natural grade, if ava	ailable. Check the meas	urement used. In P	uerto Rico only,
the highest adjacent grade (HAG) and the lower a) Top of bottom floor (including basement, crawlspace, or enclosure) is	st adjacent grade (LA	G).	_	
b) Top of bottom floor (including basement, crawlspace, or enclosure) is b) Top of bottom floor (including basement, crawlspace, or enclosure) is				below the HAG.
E2. For Building Diagrams 6–9 with permanent flood the next higher floor (elevation C2.b in the diagrams) of the building is	d openings provided in	n Section A Items 8 and	_	-2 of Instructions),
E3. Attached garage (top of slab) is			ters 🔲 above or	below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is			ters 🔲 above or	below the HAG.
E5. Zone AO only: If no flood depth number is availa floodplain management ordinance? Yes	ible, is the top of the I	bottom floor elevated in n. The local official mu	accordance with th	e community's ation in Section G.
SECTION F – PROPERTY OV	WNER (OR OWNER'S	S REPRESENTATIVE)	CERTIFICATION	
The property owner or owner's authorized representa	tive who completes S	Sections A. B. and E for	Zone A (without a F	EMA-issued or
community-issued BFE) or Zone AO must sign here. Property Owner or Owner's Authorized Representativ		ections A, B, and E are c	orrect to the best o	f my knowledge.
	c 3 Name			
Address	City	y	State	ZIP Code
Signature	Dat	te	Геlерhonе	
Comments				
				1
			Check he	ere if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	sponding information	on from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Su	ite and/or Bldg. No.)	or P.O. Route and Box	No. Policy Number:
112 S. 23rd Avenue	ito, and or blug.		
100 300 00 00 00 00 00 00 00 00 00 00 00	State	ZIP Code	Company NAIC Number
City Borough of Longport	New Jersey	08403	
		INFORMATION (OPTI	ONAL)
engineer, or architect who is authorize	er meters.	the applicable from the hoon of	signed and sealed by a licensed surveyor, dicate the source and date of the elevation
data in the Comments area below.)			t a FEMA-issued or community-issued BFE)
or Zone AO.			
G3.	G10) is provided for (community noodplain in	
G4. Permit Number	G5. Date Permit Iss	sued	G6. Date Certificate of Compliance/Occupancy Issued
		Cubatantial Improve	ment
G7. This permit has been issued for:	New Construction [Substantial Improve	mone
G8. Elevation of as-built lowest floor (including of the building:	g basement)		feet meters Datum
G9. BFE or (in Zone AO) depth of flooding at	the building site:		feet meters Datum
G10. Community's design flood elevation:	_		feet meters Datum
Local Official's Name		Title	
Community Name		Telephone	
Signature	sil	Date	a a
Comments (including type of equipment and lo	cation, per C2(e), if a	pplicable)	
Comments (including type of equipment and is	odii o		
			9
8			
0			Check here if attachments.

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

ELEVATION CERTIFICATE	See Instructions	for Item A6.	Expiration Date: November 30, 2022
IMPORTANT: In these spaces, copy the corr	responding information	from Section A.	FOR INSURANCE COMPANY USE Policy Number:
Building Street Address (including Apt., Unit, S	Suite, and/or Bldg. No.) or	F.O. Notice and Box 116.	,
112 S. 23rd Avenue	State	ZIP Code	Company NAIC Number
City Borough of Longport	New Jersey	08403	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or view or indicated in Scatter A8. If submitted and the state of the s vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Front View 5-5-21 Photo One Caption

Clear Photo One



Photo Two

Photo Two Caption Rear View 5-5-21

Clear Photo Two Form Page 5 of 6

Replaces all previous editions.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 112 S. 23rd Avenue			FOR INSURANCE COMPANY USE Policy Number:	
Borough of Longport	New Jersey	08403		

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three Caption Electric Generator 5-5-21

Clear Photo Three

Form Page 6 of 6



Photo Four

Photo Four Caption Smart Vent 5-5-21

EMA Form 000 0 22 (42/40)

Clear Photo Four



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2021 This report is subject to renewal 02/2023.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 45— VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS; MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514; FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

A Subsidiary of CODE COUNCIL

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- **6.2** Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368

www.smartvent.com info@smartvent.com

TABLE 1—MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT [®]	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT [®] Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For Si: 1 inch = 25.4 mm; 1 square foot = m^2

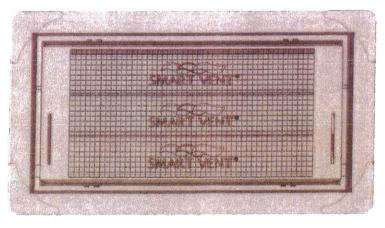


FIGURE 1-SMART VENT: MODEL 1540-510

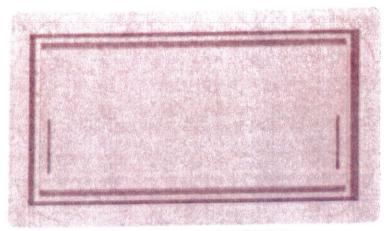


FIGURE 2—SMART VENT MODEL 1540-520

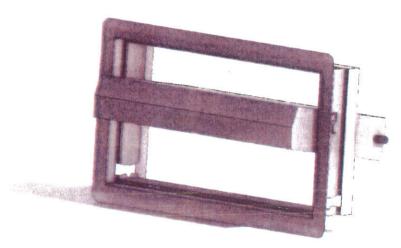


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

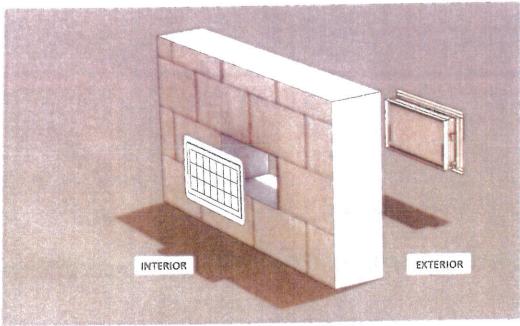


FIGURE 4-FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021.

Page 4 of 5



ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2017 Florida Building Code—Building
- 2017 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the FRC, provided the design and installation are in accordance with the 2015 *International Building Code®* provisions noted in the evaluation report.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential .

For products falling under Florida Rule 9N-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021.



DIAGRAM 7

All buildings elevated on full-story foundation walls with a partially or fully enclosed area below the elevated floor. This includes walkout levels, where at least 1 side is at or above grade. The principal use of this building is located in the elevated floors of the building.

Distinguishing Feature – For all zones, the area below the elevated floor is enclosed, either partially or fully. In A Zones, the partially or fully enclosed area below the elevated floor is with or without openings** present in the walls of the enclosure. Indicate information about enclosure size and openings in Section A – Property Information.




DIAGRAM 8

All buildings elevated on a crawispace with the floor of the crawispace at or above grade on at least 1 side, with or without an attached garage.

Distinguishing Feature – For all zones, the area below the first floor is enclosed by solid or partial perimeter walls. In all A zones, the crawlspace is with or without openings** present in the walls of the crawlspace. Indicate information about crawlspace size and openings in Section A – Property Information.


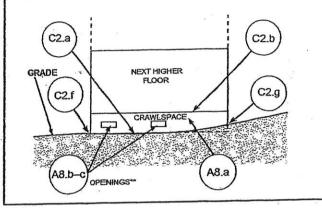


DIAGRAM 9

All buildings (other than split-level) elevated on a subgrade crawlspace, with or without attached garage.

Distinguishing Feature – The bottom (crawlspace) floor is below ground level (grade) on all sides.* (If the distance from the crawlspace floor to the top of the next higher floor is more than 5 feet, or the crawlspace floor is more than 2 feet below the grade [LAG] on all sides, use Diagram 2A or 2B.)

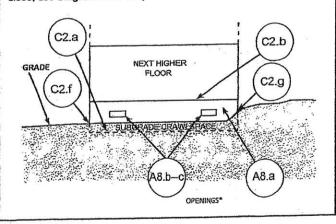

- * A floor that is below ground level (grade) on all sides is considered a basement even if the floor is used for living purposes, or as an office, garage, workshop, etc.
- ** An "opening" is a permanent opening that allows for the free passage of water automatically in both directions without human intervention.

 Under the NFIP, a minimum of 2 openings is required for enclosures or crawlspaces. The openings shall provide a total net area of not less than 1 square inch for every square foot of area enclosed, excluding any bars, louvers, or other covers of the opening. Alternatively, an Individual Engineered Flood Openings Certification or an Evaluation Report issued by the International Code Council Evaluation Service (ICC ES) must be submitted to document that the design of the openings will allow for the automatic equalization of hydrostatic flood forces on exterior walls. A window, a door, or a garage door is not considered an opening; openings may be installed in doors. Openings shall be on at least 2 sides of the enclosed area. If a building has more than 1 enclosed area, each area must have openings to allow floodwater to directly enter. The bottom of the openings must be no higher than 1.0 foot above the higher of the exterior or interior grade or floor immediately below the opening. For more guidance on openings, see NFIP Technical Bulletin 1.

